

E-Line

Case Features:

Available for Pastry, Desserts, Salads
Chocolates and Prepared Foods

Wide open display area that maximizes
product visibility

Dupla Refrigerated/ Chocolate Display
Case offers the option of either case.

Custom color design and finishing options
for case panels

Available in multiple lengths and 2 height
options

Glass options of Straight, Curved, or
Straight Glass with Posts

Available in coordinating 90° and 45°
Closed and Open Angle Display Cases




Plug Type
(All Models)



6-15P



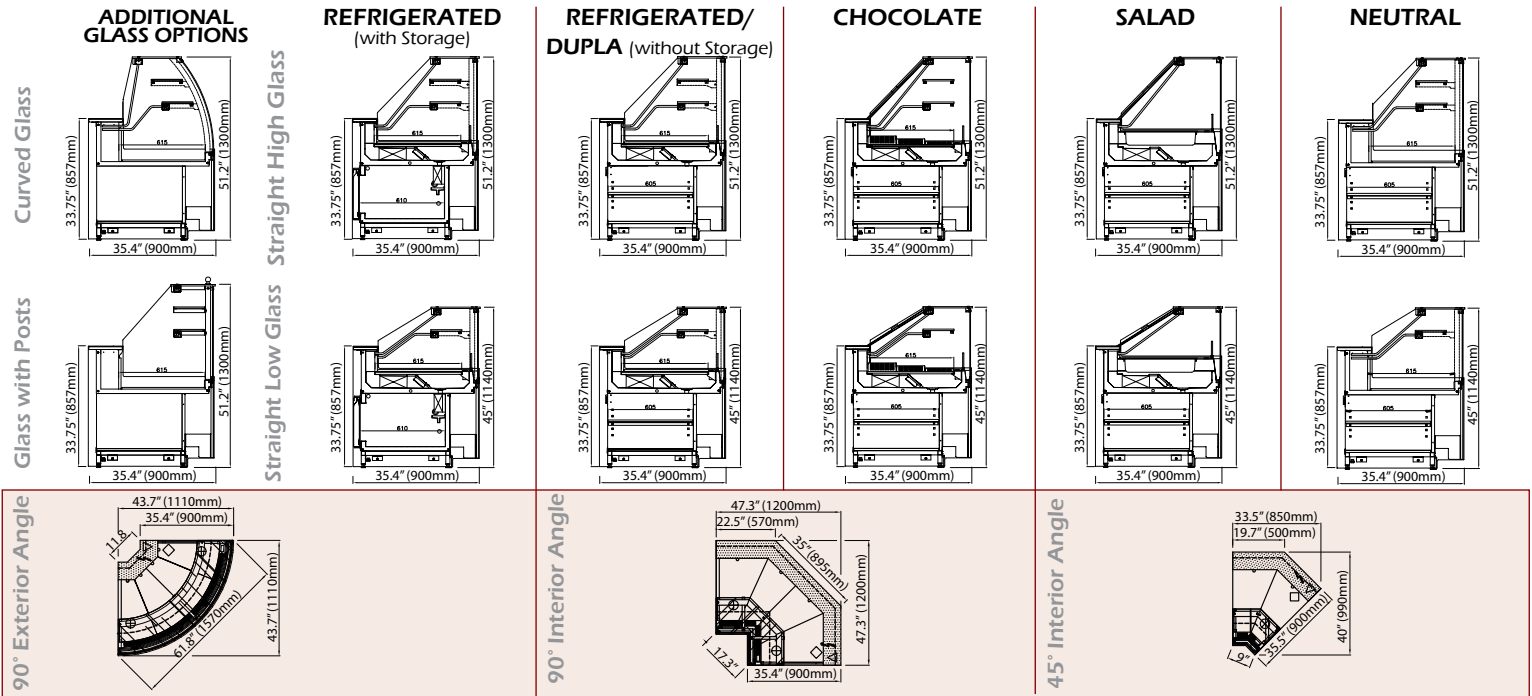

*** Bottom Shelf is Refrigerated * Top 2 Shelves are Non-Refrigerated**

DISPLAY CASES						
Type	Model	Width	Depth	Height (High Glass)	Height (Low Glass)	Electrical Requirements
Refrigerated with Refrigerated Under Storage	ELVT-1250	50.7" (1288mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 5 Amps
	ELVT-1650	66.5" (1688mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	ELVT-2050	82.2" (2088mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	ELVT-2500	100" (2538mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
Refrigerated without Refrigerated Under Storage	ELVS-850	35" (888mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	ELVS-1250	50.7" (1288mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	ELVS-1650	66.5" (1688mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 9 Amps
	ELVS-2050	82.2" (2088mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 9 Amps
	ELVS-2500	100" (2538mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 10 Amps
	ELVSE-90	61.8" (1570mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	ELVSI-90	17.3" (440mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
ELVSI-45	9" (230mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 6 Amps	
Chocolate	ELCHS-850	35" (888mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	ELCHS-1250	50.7" (1288mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	ELCHS-1650	66.5" (1688mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
Refrigerated/Chocolate DUPLA	ELVS/CHS-850 DUPLA	35" (888mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	ELVS/CHS-1250 DUPLA	50.7" (1288mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	ELVS/CHS-1650 DUPLA	66.5" (1688mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 9 Amps
	ELVS/CHS-2050 DUPLA	82.2" (2088mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 9 Amps

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.

DISPLAY CASES

Type	Model	Width	Depth	Height (High Glass)	Height (Low Glass)	Electrical Requirements
Salad	ELSLS-850	35" (888mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 5 Amps
	ELSLS-1250	50.7" (1288mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 5 Amps
	ELSLS-1650	66.5" (1688mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
Neutral	ELNT-850	35" (888mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNT-1250	50.7" (1288mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNT-1650	66.5" (1688mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNT-2050	82.2" (2088mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNT-2500	100" (2538mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNTE-90	61.8" (1570mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNTI-90	17" (440mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNTI-45	9" (230mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps

*** Cases available in straight and curved glass.**



All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.