

# E-Line

## Case Features:

Available for Pastry, Desserts, Salads  
Chocolates and Prepared Foods

Wide open display area that maximizes  
product visibility

Dupla Refrigerated/ Chocolate Display  
Case offers the option of either case.

Custom color design and finishing options  
for case panels

Available in multiple lengths and 2 height  
options

Glass options of Straight, Curved, or  
Straight Glass with Posts

Available in coordinating 90° and 45°  
Closed and Open Angle Display Cases




Plug Type  
(All Models)



6-15P



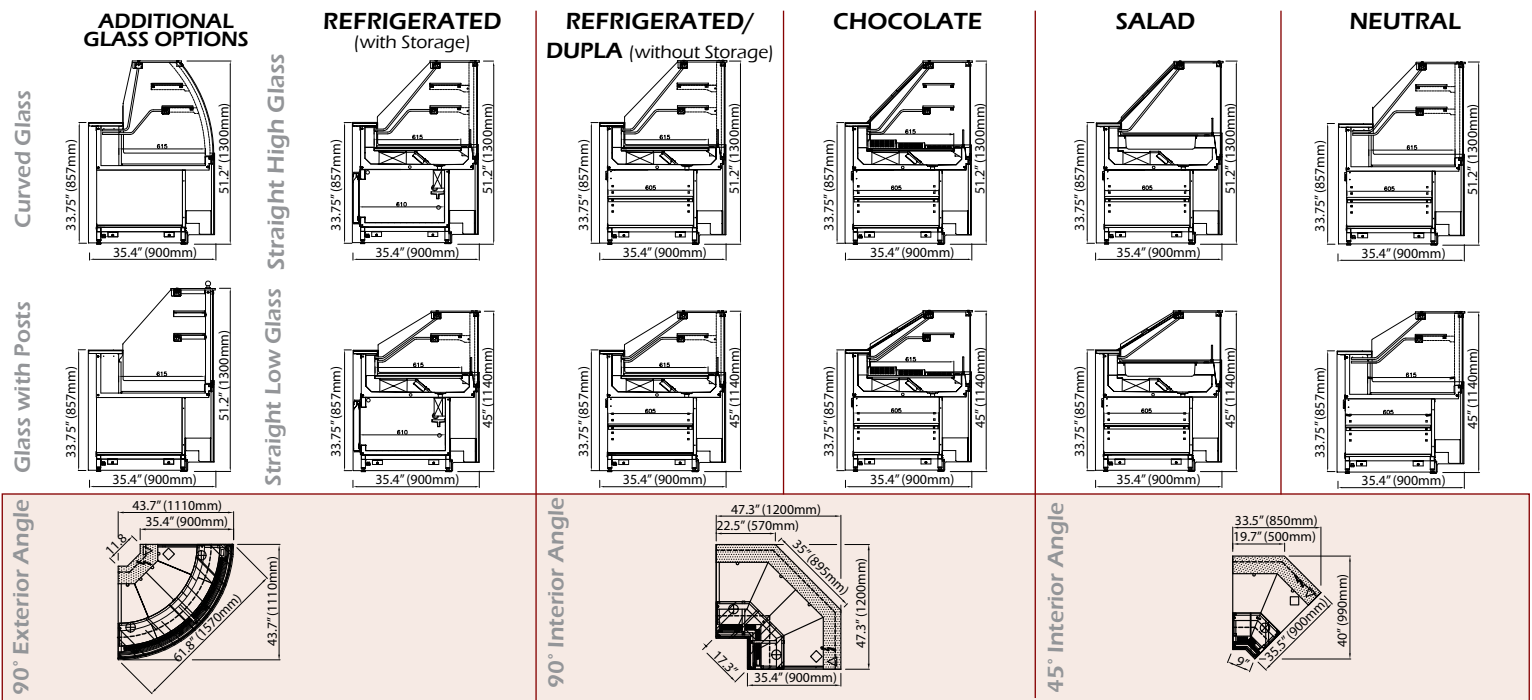

**\* Bottom Shelf is Refrigerated \* Top 2 Shelves are Non-Refrigerated**

DISPLAY CASES						
Type	Model	Width	Depth	Height (High Glass)	Height (Low Glass)	Electrical Requirements
Refrigerated with Refrigerated Under Storage	<b>ELVT-1250</b>	52.5" (1326mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 5 Amps
	<b>ELVT-1650</b>	68" (1726mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	<b>ELVT-2050</b>	84.5" (2126mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	<b>ELVT-2500</b>	101.5" (2576mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
Refrigerated without Refrigerated Under Storage	<b>ELVS-850</b>	36.5" (926mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	<b>ELVS-1250</b>	52.5" (1326mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	<b>ELVS-1650</b>	68" (1726mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 9 Amps
	<b>ELVS-2050</b>	84" (2126mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 9 Amps
	<b>ELVS-2500</b>	101.5" (25376m)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 10 Amps
	<b>ELVSE-90</b>	65" (1646m)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	<b>ELVSI-90</b>	20.5" (516mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	<b>ELVSI-45</b>	10.5" (268mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 6 Amps
Chocolate	<b>ELCHS-850</b>	36.5" (926mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	<b>ELCHS-1250</b>	52" (1326mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	<b>ELCHS-1650</b>	68" (1726mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
Refrigerated/Chocolate DUPLA	<b>ELVS/CHS-850 DUPLA</b>	36.5" (926mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	<b>ELVS/CHS-1250 DUPLA</b>	52" (1326mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
	<b>ELVS/CHS-1650 DUPLA</b>	68" (1726mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 9 Amps
	<b>ELVS/CHS-2050 DUPLA</b>	84" (2126mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 9 Amps

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.



# DISPLAY CASES

Type	Model	Width	Depth	Height (High Glass)	Height (Low Glass)	Electrical Requirements
Salad	ELSLS-850	35" (888mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 5 Amps
	ELSLS-1250	50.7" (1288mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 5 Amps
	ELSLS-1650	66.5" (1688mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 7 Amps
Neutral	ELNT-850	35" (888mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNT-1250	50.7" (1288mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNT-1650	66.5" (1688mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNT-2050	82.2" (2088mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNT-2500	100" (2538mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNTE-90	61.8" (1570mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNTI-90	17" (440mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps
	ELNTI-45	9" (230mm)	35.5" (900mm)	51.2" (1300mm)	45" (1140mm)	220V/1Phase/60Hz/ 4 Amps

**\* Cases available in straight and curved glass.**



All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.