




Kubo


Case Features:

- Available for Pastry, Desserts, Salads, Chocolates, Prepared Foods, and Bain Marie
- Available in multiple lengths and glass angles for perfect space planning
- Combination refrigerated and dry display case
- Refrigerated, Humidity Control, Dry-Ambient and Heated versions
- Rear sliding doors
- LED light technology enhances presentation
- Stand alone installation or channeled with 90° angle display
- Choice of Colors/Laminates and Finishes for the front case decoration

Plug Type
(All Models)



6-15P

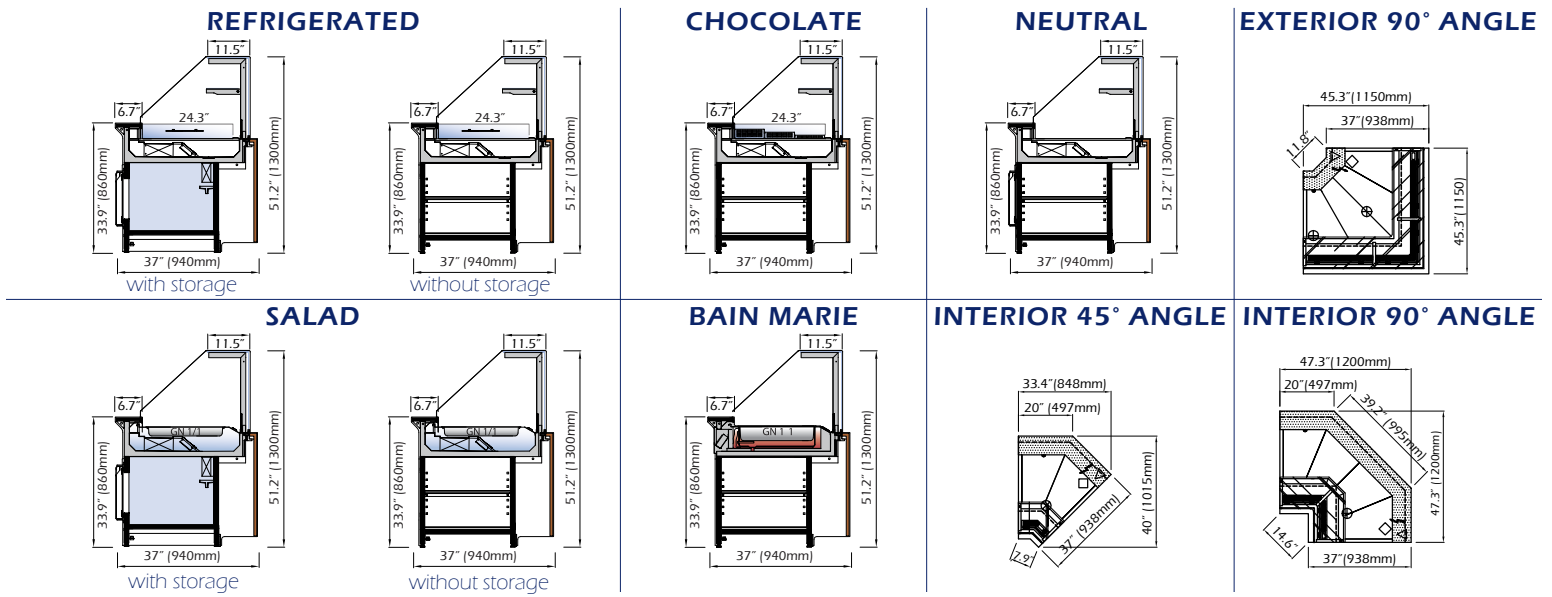

*** BOTTOM SHELF IS REFRIGERATED | TOP 2 SHELVES ARE NON-REFRIGERATED**

DISPLAY CASES

Type	Model	Width	Depth	Height	Electrical Requirements
Refrigerated (with Storage)	KBVT - 1250	51.6" (1310mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/5 Amps
	KBVT - 1650	67.3" (1710mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/5 Amps
	KBVT - 2050	83.1" (2110mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/10 Amps
	KBVT - 2500	100.8" (2560mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/10 Amps
Refrigerated (without Storage) <small>(Please note these dimensions are the same for Neutral cases)</small>	KBVS - 850	35.8" (910mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/5 Amps
	KBVS - 1250	51.6" (1310mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/5 Amps
	KBVS - 1650	67.3" (1710mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/5 Amps
	KBVS - 2050	83.1" (2110mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/10 Amps
	KBVS - 2500	100.8" (2560mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/10 Amps
90° Exterior Angle	KBCER90	45.3" (1150mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/5 Amps
90° & 45° Interior Angle	KBCIR90	14.6" (370mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/5 Amps
	KBCIR45	7.9" (200mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/5 Amps
Chocolate	KBCHS - 850	35.8" (910mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/5 Amps
	KBCHS - 1250	51.6" (1310mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/5 Amps
Salad (with Storage)	KBSLT - 1250	51.6" (1310mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/10 Amps
	KBSLT - 1650	67.3" (1710mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/10 Amps
Salad (without Storage)	KBSLS - 850	35.8" (910mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/5 Amps
	KBSLS - 1250	51.6" (1310mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/5 Amps
	KBSLS - 1650	67.3" (1710mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/5 Amps
Bain Marie	KBBM - 850	35.8" (910mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/10 Amps
	KBBM - 1250	51.6" (1310mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/15 Amps
	KBBM - 1650	67.3" (1710mm)	37" (938mm)	51.2" (1300mm)	220V/1Phase/60Hz/15 Amps

OPTIONS



Salad/Prepared Foods Display

Refrigerated Undercounter Storage

Stainless Steel Shelf

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.