



# LB 1002

RTX G TRU-2

A dynamic high capacity Carpigiani machine allows you to create both high and low overrun frozen products such as Ice Cream, Gelato, Sorbet, Sherbet, Custard, Water Ice and more..Ideal for high volume Ice Cream production.



**Performance and Quality** Patented Hard-O-Dynamic technology achieves desired consistency with any batch size. Electronic controls automatically maintain product until extraction begins. Beater resists extreme hot and cold temperatures and includes auto-adjusting scrapers for complete extraction. Includes separate Ice Cream and Gelato beaters for both high & low overrun Frozen Desserts.



**Convenience** Automatic Control provides unparalleled flexibility and ease of operation. Audible alarm signals when product achieves desired consistency. Maximized extraction results in minimal flavor overlap with less frequent rinsing. Optional shelf mat designed to hold trays & tubs during extraction.



**Savings** Lowest power consumption in the industry while providing some of the quickest batch freezing times. Self-adjusting scraper can be replaced without needing a new beater. Air-cooling option available.




**Safety** Automatic defrost starts during power outages to avoid damage to beater. Rounded corners reduce risk of injury to operator. Operations are done standing up for user comfort.



**Hygiene** Built-in faucet with flex hose makes cleaning fast and easy. Removable extraction chute for easy cleaning. Scotch-Brite treated steel is resistant to stains and fat residues. Ask your Carpigiani Sales Representative for the "Carpi Care Kit" to best maintain equipment.



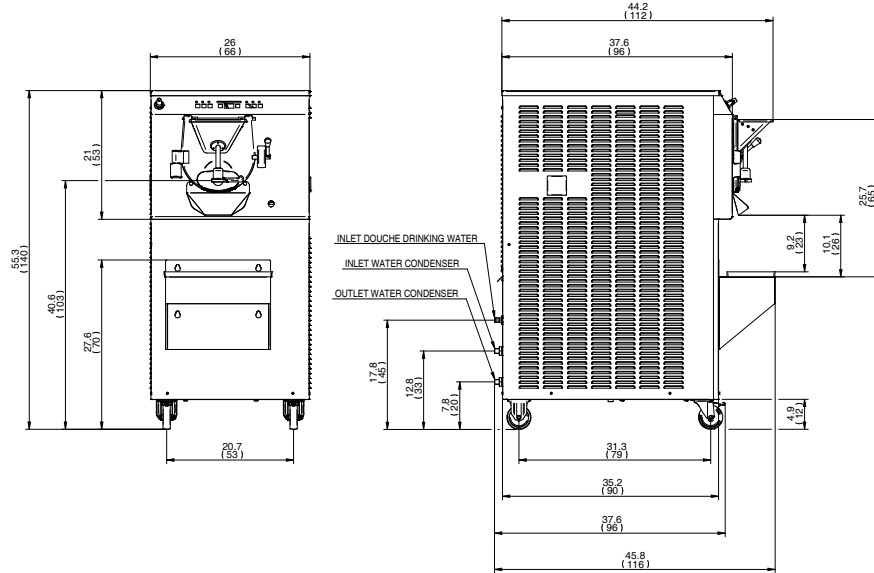

### WATER

		lbs.	kgs.
Weights			
Net		992	450
Crated		1135	515
		cu. ft.	cu. m.
Volume		64.6	1.83
		in.	cm.
Dimensions			
Width		26	66
Depth		45.8	116
Height		55.3	140
		Maximum Fuse Size	Minimum Circuit Ampacity
Electrical			
208-230/60/3 Water		80A	57A
		Poles (P)	Wires (W)
			3P, 3W

## Specifications

### Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See the Electrical chart for the proper electrical requirements. Consult your local Carpigiani distributor for cord & receptacle specifications as local codes allow.

### Beater Motor

5/10 HP

### Refrigeration System

R404A

### Water Cooled

Water inlets and drain connections in the rear 1/2" MPT

### Cylinder Capacity

37 quarts (35 liters)

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary. This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals, please consult the local Carpigiani Distributor. Check name plate for exact electrical data. \* Room temperature 68 °F (20 °C).

Bidding Specs									
Electrical	Volt	Hz	Ph	Neutral	Yes	No	Cooling	Air	Water
Options									



Distributed by:

GTI Designs  
35 Trade Zone Court  
Ronkonkoma, NY 11779

Tel: 800-896-4484  
631-981-2100  
CustomerService@gtidesigns.com  
www.gtidesigns.com