







# UNITED

## GRAB & GO

### MERCHANDISER FEATURES:

- Multi-Deck available in 3 versions:  
Regular Standard Depth  
Slim Narrow Depth  
Heated (Regular & Slim Depth)  
Xtra View (Regular & Slim Depth)
- Offered in various size configurations
- Ventilated cooling system, with 2 classes of temperatures for Dairy Products and for Meat and Poultry
- Interior area & Shelving Design:  
Standard White or Stainless Steel
- Glass or Solid Side Panels
- Rear Pass Through Door Option to enable easy loading where location allows
- Electronic Digital Control
- Heavy Duty Casters Standard
- LED Lights Standard on all Shelves
- Adjustable Shelves Standard - Flat or Angles Option
- Pull Down Night Curtain Standard



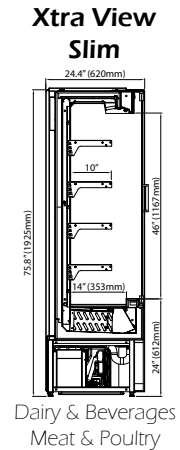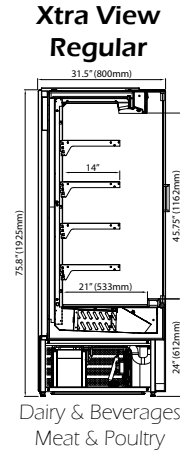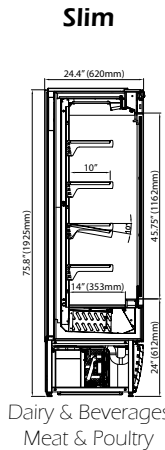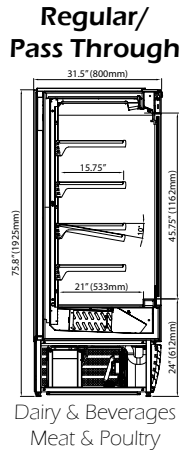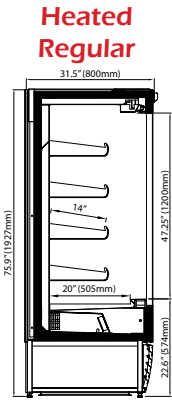

## DISPLAY CASES

Type	Model	Width (w/side panels)	Depth	Height (with 3" casters)	Electrical Requirements
United Regular	UR - 625	27" (685mm)	31.5" (800mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	UR - 937	39.25" (997mm)	31.5" (800mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	UR - 1250	51.6" (1310mm)	31.5" (800mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	UR - 1562	63.9" (1622mm)	31.5" (800mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	UR - 1875	76.2" (1935mm)	31.5" (800mm)	78.8" (2002mm)	220V/1Phase/60Hz/30 Amp Breaker
	UR - 2500	100.8" (2560mm)	31.5" (800mm)	78.8" (2002mm)	**2 x 220V/1Phase/60Hz/30 Amp Breaker
Heated	UH - 625	27" (685mm)	31.5" (800mm)	78.8" (2002mm)	220V/1Phase/60Hz/15 Amps
	UH - 937	39.25" (997mm)	31.5" (800mm)	78.8" (2002mm)	220V/1Phase/60Hz/20 Amps
United Pass through	URPT-937	39.25" (997mm)	31.5" (800mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	URPT-1250	51.6" (1310mm)	31.5" (800mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	URPT-1562	63.9" (1622mm)	31.5" (800mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	URPT-1875	76.2" (1935mm)	31.5" (800mm)	78.8" (2002mm)	220V/1Phase/60Hz/30 Amp Breaker
United Slim	USL - 625	27" (685mm)	24.4" (620mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	USL - 937	39.25" (997mm)	24.4" (620mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	USL - 1250	51.6" (1310mm)	24.4" (620mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	USL - 1562	63.9" (1622mm)	24.4" (620mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	USL - 1875	76.2" (1935mm)	24.4" (620mm)	78.8" (2002mm)	220V/1Phase/60Hz/30 Amp Breaker
Heated	UHSL - 625	27" (685mm)	24.4" (620mm)	78.8" (2002mm)	220V/1Phase/60Hz/15 Amps
	UHSL - 937	39.25" (997mm)	24.4" (620mm)	78.8" (2002mm)	220V/1Phase/60Hz/20 Amps
Xtra View Regular	UXVR - 625	27" (685mm)	31.5" (800mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	UXVR - 937	38.5" (977mm)	31.5" (800mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	UXVR - 1250	50.8" (1290mm)	31.5" (800mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	UXVR - 1562	63.1" (1602mm)	31.5" (800mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
Xtra View Slim	UXVSL - 625	26.2" (665mm)	24.4" (620mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	UXVSL - 937	38.5" (977mm)	24.4" (620mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	UXVSL - 1250	50.8" (1290mm)	24.4" (620mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker
	UXVSL - 1562	63.1" (1602mm)	24.4" (620mm)	78.8" (2002mm)	115V/1Phase/60Hz/30 Amp Breaker

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.

