



AG Series

GELATO



High Glass



Low Glass

FEATURES


AG-Series Display Case

- Available for: Gelato & Ice Cream or Pastry, Desserts, Chocolates, Panini, Prepared Foods and Confectionery
- All Gelato and Ice Cream Cases Includes a set of stainless steel pans
- Curved, tempered, double pane heated glass prevents condensation
- Able to seamlessly channel cases together - "Seamless Look"
- Hydraulic piston hinge opening for the glass top
- Digital temperature control panel
- High glass or low glass options
- Standard heavy duty casters
- Choice of color and finishes
- Straight front glass profile
- Classic European Design
- Large display capacity
- Front Opening Glass
- Sliding back doors
- LED lights




REFRIGERATED


Low Glass Side View

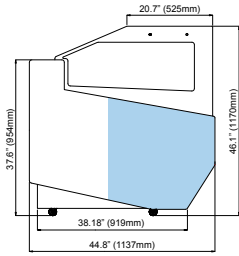


High Glass Side View

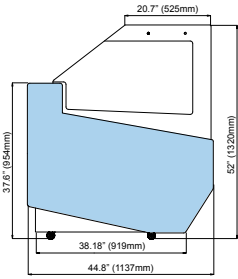


Front View

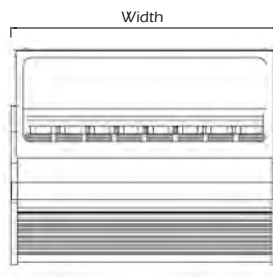

45° Angle Top View

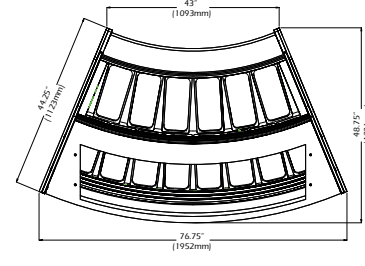

Plug Type



L6-20p
AG 12 & 16




L6-30p
AG 18,20,24,45

Plug Type
(All Refrigerated Models)




L6-15p


Low Glass Side View

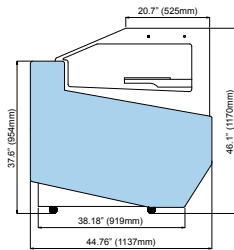


High Glass Side View

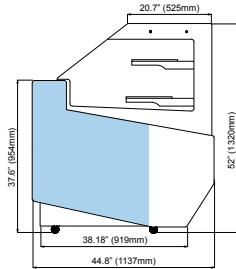

Front View

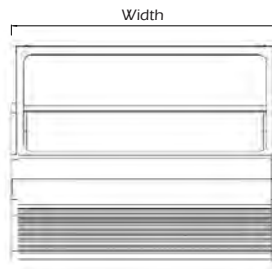

45° Angle Top View

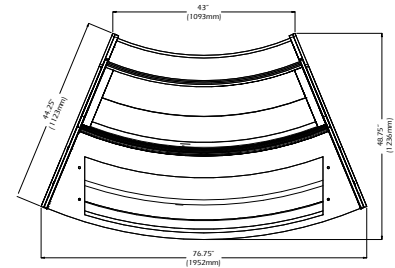

DISPLAY CASES

Type	Model	Width	Depth	Height	Electrical Requirements
Gelato (High Glass)	AG - 12GH	48.43" (1230mm)	44." (1137mm)	52" (1320mm)	220V/1Phase/60Hz/20 Amps
	AG - 16GH	61.6" (1565mm)	44.8" (1137mm)	52" (1320mm)	220V/1Phase/60Hz/20 Amps
	AG - 18GH	68.3" (1735mm)	44.8" (1137mm)	52" (1320mm)	220V/1Phase/60Hz/25 Amps
	AG - 24GH	88.78" (2255mm)	44.8" (1137mm)	52" (1320mm)	220V/1Phase/60Hz/30 Amps
	AG - 45GH	-	44.8" (1137mm)	52" (1320mm)	220V/1Phase/60Hz/30 Amps
Gelato (Low Glass)	AG - 12GL	48.43" (1230mm)	44.8" (1137mm)	46" (1170mm)	220V/1Phase/60Hz/20 Amps
	AG - 16GL	61.6" (1565mm)	44.8" (1137mm)	46" (1170mm)	220V/1Phase/60Hz/20 Amps
	AG - 18GL	68.3" (1735mm)	44.8" (1137mm)	46" (1170mm)	220V/1Phase/60Hz/25 Amps
	AG - 24GL	88.78" (2255mm)	44.8" (1137mm)	46" (1170mm)	220V/1Phase/60Hz/30 Amps
	AG - 45GL	-	44.8" (1137mm)	52" (1320mm)	220V/1Phase/60Hz/30 Amps
Refrigerated (High Glass)	AG - 1250PH	48.43" (1230mm)	45" (1143mm)	51.6" (1310mm)	220V/1Phase/60Hz/10 Amps
	AG - 1500PH	61.6" (1565mm)	45" (1143mm)	51.6" (1310mm)	220V/1Phase/60Hz/10 Amps
	AG - 1750PH	68.3" (1735mm)	45" (1143mm)	51.6" (1310mm)	220V/1Phase/60Hz/10 Amps
	AG - 2250PH	88.78" (2255mm)	45" (1143mm)	51.6" (1310mm)	220V/1Phase/60Hz/10 Amps
	AG - 45PH	-	45" (1143mm)	51.6" (1310mm)	220V/1Phase/60Hz/10 Amps
Refrigerated (Low Glass)	AG - 1250PL	48.43" (1230mm)	45" (1143mm)	46" (1170mm)	220V/1Phase/60Hz/10 Amps
	AG - 1500PL	61.6" (1565mm)	45" (1143mm)	46" (1170mm)	220V/1Phase/60Hz/10 Amps
	AG - 1750PL	68.3" (1735mm)	45" (1143mm)	46" (1170mm)	220V/1Phase/60Hz/10 Amps
	AG - 2250PL	88.78" (2255mm)	45" (1143mm)	46" (1170mm)	220V/1Phase/60Hz/10 Amps
	AG - 45PL	-	45" (1143mm)	46" (1170mm)	220V/1Phase/60Hz/10 Amps

▪ **Ventilated Refrigeration**

▪ **Automatic Defrost Cycle**

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.