



AG Series

GELATO



High Glass



Low Glass


AG-Series Display Case

- Available for: Gelato & Ice Cream or Pastry, Desserts, Chocolates, Panini, Prepared Foods and Confectionery
- All Gelato and Ice Cream Cases Includes a set of stainless steel pans
- Curved, tempered, double pane heated glass prevents condensation
- Able to seamlessly channel cases together - "Seamless Look"
- Hydraulic piston hinge opening for the glass top
- Digital temperature control panel
- High glass or low glass options
- Standard heavy duty casters
- Choice of color and finishes
- Straight front glass profile
- Classic European Design
- Large display capacity
- Front Opening Glass
- Sliding back doors
- LED lights




REFRIGERATED



Low Glass Side View



High Glass Side View



Front View

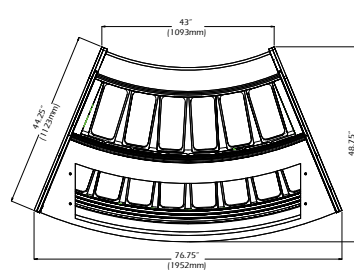45° Angle
Top View


14 Flavors

Plug Type


L6-20p
AG 12 & 16L6-30p
AG 18,20,24,45Plug Type
(All Refrigerated
Models)

L6-15p



Low Glass Side View



High Glass Side View



Front View

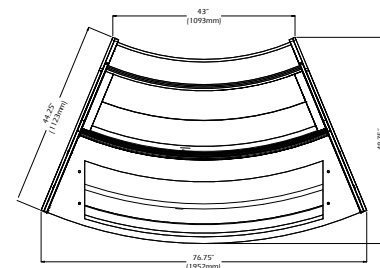45° Angle
Top View

DISPLAY CASES

Type	Model	Width	Depth	Height	Electrical Requirements
Gelato (High Glass)	A-SG - 12GH	48.43" (1230mm)	44." (1137mm)	52" (1320mm)	220V/1Phase/60Hz/20 Amps
	A-SG - 16GH	61.6" (1565mm)	44.8" (1137mm)	52" (1320mm)	220V/1Phase/60Hz/20 Amps
	A-SG - 18GH	68.3" (1735mm)	44.8" (1137mm)	52" (1320mm)	220V/1Phase/60Hz/25 Amps
	A-SG - 24GH	88.78" (2255mm)	44.8" (1137mm)	52" (1320mm)	220V/1Phase/60Hz/30 Amps
	A-SG - 45GH	—	44.8" (1137mm)	52" (1320mm)	220V/1Phase/60Hz/30 Amps
Gelato (Low Glass)	A-SG - 12GL	48.43" (1230mm)	44.8" (1137mm)	46" (1170mm)	220V/1Phase/60Hz/20 Amps
	A-SG - 16GL	61.6" (1565mm)	44.8" (1137mm)	46" (1170mm)	220V/1Phase/60Hz/20 Amps
	A-SG - 18GL	68.3" (1735mm)	44.8" (1137mm)	46" (1170mm)	220V/1Phase/60Hz/25 Amps
	A-SG - 24GL	88.78" (2255mm)	44.8" (1137mm)	46" (1170mm)	220V/1Phase/60Hz/30 Amps
	A-SG - 45GL	—	44.8" (1137mm)	52" (1320mm)	220V/1Phase/60Hz/30 Amps
Refrigerated (High Glass)	A-SG - 1250PH	48.43" (1230mm)	45" (1143mm)	51.6" (1310mm)	220V/1Phase/60Hz/10 Amps
	A-SG - 1500PH	61.6" (1565mm)	45" (1143mm)	51.6" (1310mm)	220V/1Phase/60Hz/10 Amps
	A-SG - 1750PH	68.3" (1735mm)	45" (1143mm)	51.6" (1310mm)	220V/1Phase/60Hz/10 Amps
	A-SG - 2250PH	88.78" (2255mm)	45" (1143mm)	51.6" (1310mm)	220V/1Phase/60Hz/10 Amps
	A-SG - 45PH	—	45" (1143mm)	51.6" (1310mm)	220V/1Phase/60Hz/10 Amps
Refrigerated (Low Glass)	A-SG - 1250PL	48.43" (1230mm)	45" (1143mm)	46" (1170mm)	220V/1Phase/60Hz/10 Amps
	A-SG - 1500PL	61.6" (1565mm)	45" (1143mm)	46" (1170mm)	220V/1Phase/60Hz/10 Amps
	A-SG - 1750PL	68.3" (1735mm)	45" (1143mm)	46" (1170mm)	220V/1Phase/60Hz/10 Amps
	A-SG - 2250PL	88.78" (2255mm)	45" (1143mm)	46" (1170mm)	220V/1Phase/60Hz/10 Amps
	A-SG - 45PL	—	45" (1143mm)	46" (1170mm)	220V/1Phase/60Hz/10 Amps

▪ Ventilated Refrigeration

▪ Automatic Defrost Cycle

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.