

# UNITED SLIM | PASS THROUGH

REFRIGERATED | PACKAGED FOOD | BEVERAGES

gti **DESIGNS**


Project: \_\_\_\_\_ Item #: \_\_\_\_\_  
Location: \_\_\_\_\_ Approved: \_\_\_\_\_

**631-981-2100**

## Refrigerated Merchandiser

### Standard Features:

- Ventilated cooling system, with 2 classes of temperature.
- Vertical LED Lighting
- LED lighting under each shelf
- Self-Contained - with condensation pan (no floor drain required)
- Electronic digital control panel
- Stainless steel exterior and interior finish, standard
- Glass side panels
- Pull down night curtain
- Adjustable shelves - flat or angled option
- Adjustable equipment legs
- Price tag moldings
- 3" heavy duty casters

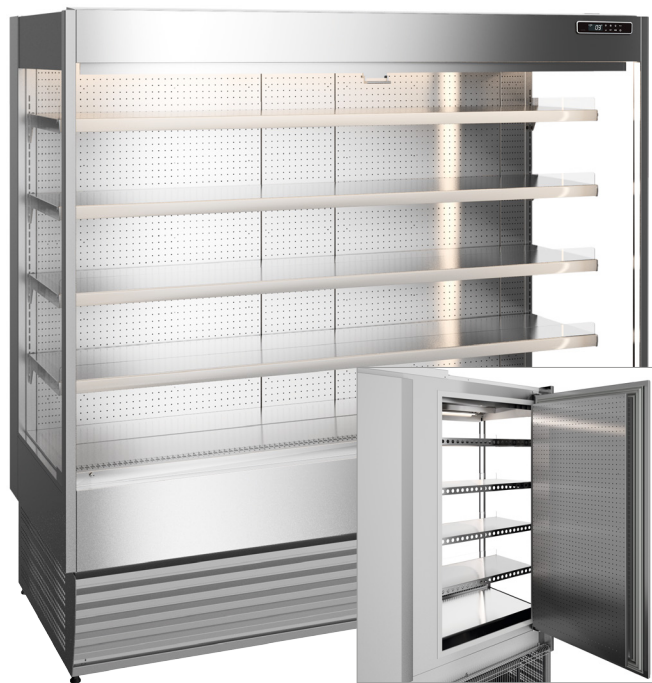


Rear pass through doors

### Optional Accessories:

- Channel Kit (to seam two separate cases together without side panels)
- Solid side panels
- Glass front doors
- Remote (ask for specifications)
- Electronic shutter door with lock (height 87") not available for USL-1875



Optional glass doors (D)

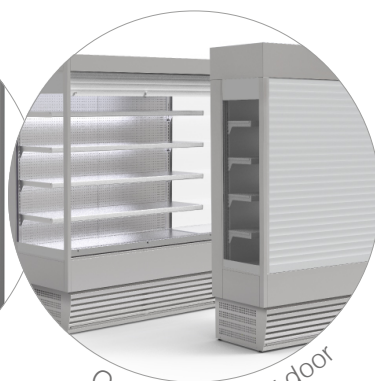

Optional shutter door




# UNITED SLIM | PASS THROUGH


## GRAB AND GO REFRIGERATED DISPLAY CASE




### Top View

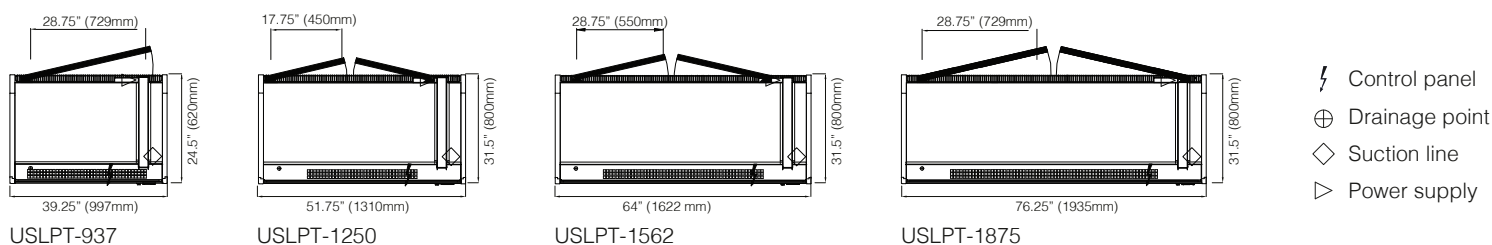

### Side View



### Rear & Front View

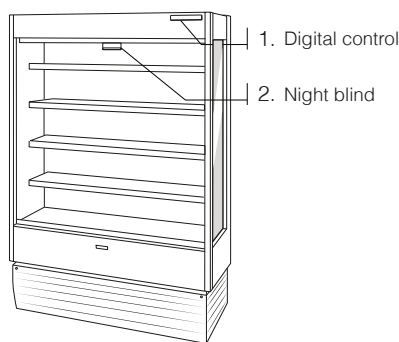

### Technical Specifications & Electrical Requirements

| Type        | Model #     | Dimensions<br>W x D x H (In.) | Net Wt.<br>(Lbs.) | Amps. | HP    | Nema<br>Plug | Capacity<br>(Cu. Ft.) |
|-------------|-------------|-------------------------------|-------------------|-------|-------|--------------|-----------------------|
| Night Blind | USLPT-937   | 39.25" x 31.5" x 79"          | 529               | 23    | 1     | L5-30P       | 15.40                 |
|             | USLPT-1250  | 51.75 x 31.5" x 79"           | 683               | 25    | 1 1/4 | L5-30P       | 20.52                 |
|             | USLPT-1562  | 64" x 31.5" x 79"             | 807               | 29    | 1 1/4 | L5-30P       | 25.64                 |
|             | USLPT-1875* | 76.25" x 31.5" x 79"          | 860               | 22    | 2     | L6-30P       | 30.79                 |




LED 3000K



R452A Gas



32 °F / 37.4 °F | 37.4 °F / 42.8 °F



L5-30P | L6-30P



115V/60Hz/1-Ph  
\*220V/60Hz/1-Ph

**Important Notes:** Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.  
 Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.  
 Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).  
 Tile floors, low ceilings, or small rooms will increase noise level.  
 Compressor air lower front intake. Front panel cannot be blocked.

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.