

UNITED SLIM

REFRIGERATED | PACKAGED FOOD | BEVERAGES



Project: _____ Item #: _____
Location: _____ Approved: _____

631-981-2100

Refrigerated Merchandiser


Standard Features:

- Ventilated cooling system, with 2 classes of temperature.
- Vertical LED Lighting
- LED lighting under each shelf
- Self-Contained - with condensation pan (no floor drain required)
- Electronic digital control panel
- Stainless steel exterior and interior finish, standard
- Glass side panels
- Pull down night curtain
- Adjustable shelves - flat or angled option
- Adjustable equipment legs
- Price tag moldings
- 3" heavy duty casters



Optional Accessories:

- Channel Kit (to seam two separate cases together without side panels)
- Solid side panels
- Glass front doors
- Remote (ask for specifications)
- Manual shutter door with lock not available for USL-1875 (height 83")
- Electronic shutter door with lock not available for USL-1875 (height 87")

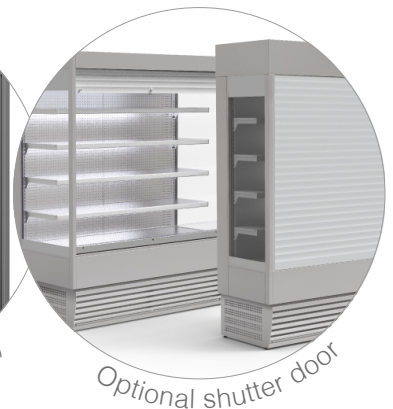


UNITED SLIM


SELF-CONTAINED | GRAB AND GO REFRIGERATED DISPLAY CASE




Top View

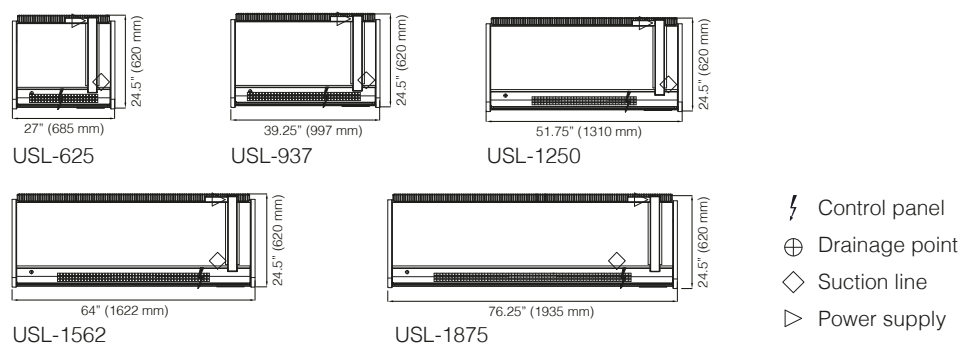

Side View



Rear & Front View

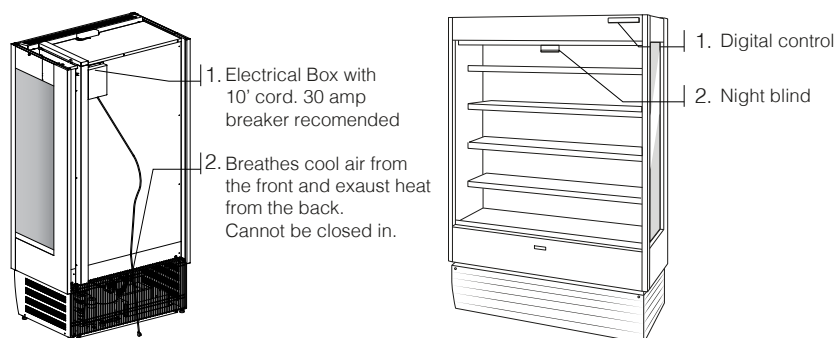

Technical Specifications & Electrical Requirements

Type	Model #	Dimensions W x D x H (In.)	Net Wt. (Lbs.)	Amps.	HP	Nema Plug	Capacity (Cu. Ft.)
Night Blind	USL-625	27" x 24.5" x 79"	388	22	1	L5-30P	6.43
	USL-937	39.25" x 24.5" x 79"	496	23	1	L5-30P	9.61
	USL-1250	51.75" x 24.5" x 79"	631	25	1 1/4	L5-30P	12.82
	USL-1562	64" x 24.5" x 79"	743	29	1 1/4	L5-30P	16.03
	USL-1875*	76.25" x 24.5" x 79"	789	22	2	L6-30P	19.25
Glass Front Doors	USL-625D	27" x 24.5" x 79"	388	22	1	L5-30P	6.43
	USL-937D	39.25" x 24.5" x 79"	496	23	1	L5-30P	9.61
	USL-1250D	51.75" x 24.5" x 79"	631	25	1 1/4	L5-30P	12.82
	USL-1562D	64" x 24.5" x 79"	743	29	1 1/4	L5-30P	16.03
	USL-1875D*	76.25" x 24.5" x 79"	789	22	2	L6-30P	19.25



LED 3000K



R452A Gas



32 °F / 37.4 °F | 37.4 °F / 42.8 °F



L5-30P | L6-30P



115V/60Hz/1-Ph
*220V/60Hz/1-Ph

Important Notes: Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty. Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption. Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.). Tile floors, low ceilings, or small rooms will increase noise level. Compressor air lower front intake. Front panel cannot be blocked.

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.

35 Trade Zone Court, Ronkonkoma, NY 11779 ■ Phone 631.981.2100 ■ CustomerService@gtidesigns.com