

FRESCO IMPULSE

REFRIGERATED | BEVERAGES | PACKAGED FOOD



Project: _____ Item #: _____
Location: _____ Approved: _____

631-981-2100

Grab and Go

Standard Features:

- Self-contained - with condensation pan (no floor drain required)
- LED lighting
- Temperature control panel
- White exterior, RAL 9003
- Stainless steel interior finish
- End panels with interior mirror
- Adjustable equipment legs
- Sealed to the ground kick plates
- Night blind



Optional Accessories:

- Square side panels
- Castor kit (add 3" to height)
- Channel Kit (to seam two separate cases together without side panels)
- Paint exterior panels, customer choice of RAL color




FRESCO IMPULSE


GRAB AND GO REFRIGERATED DISPLAY CASE




Top View



FRIMP-937




FRIMP-1250

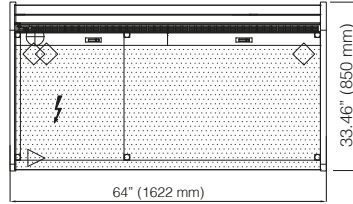


FRIMP-1562

- Control panel
- Drainage point
- Suction line
- Power supply

Side View





Rear View

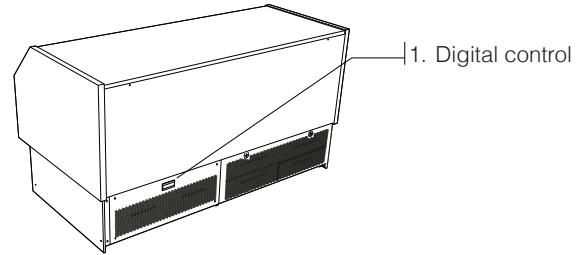

Technical Specifications & Electrical Requirements

Model #	Dimensions W x D x H (In.)	Net Wt. (Lbs.)	Amps.	HP	Nema Plug	Capacity (Cu. Ft.)
FRIMP-937	39.5" x 33.1" x 34"	506	8	3/4	6-15P	3.88
FRIMP-1250	51.75" x 33.1" x 34"	561	9	3/4	6-15P	5.19
FRIMP-1562	64" x 33.1" x 34"	611	12.5	2x3/4	6-15P	6.49



Important Notes: Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty. Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption. Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.). Tile floors, low ceilings, or small rooms will increase noise level. Compressor air lower front intake. Front panel cannot be blocked.

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.