

MAESTRO LX | SD | SLIM

REFRIGERATED | PASTRY | DESSERTS | PREPARED FOODS



Project: _____ Item #: _____
Location: _____ Approved: _____

631-981-2100

Display Case

Standard Features:

- Stainless steel deck
- Self-Contained - with condensation pan (no floor drain required)
- Square glass
- Double pane glass
- LED lighting
- Electronic digital control panel
- White exterior, RAL 9003
- Adjustable equipment legs
- Cord & Plug (6ft cord)
- Rear sliding doors



Optional Accessories:


- Channel Kit (to seam two separate cases together without side panels)
- High glass
- Paint exterior panels, customer choice of RAL color




MAESTRO LX

REFRIGERATED DISPLAY CASE


Top View




MAESTRO LX RVS 10




MAESTRO LX RVS 13



MAESTRO LX RVS 17




MAESTRO LX RVS 90DX




MAESTRO LX RVS 90SX

(dimensions are without side panels for channeling)


Side View



M1




M3



M4 (Opening front glass option)

Rear View



Technical Specifications & Electrical Requirements

Glass Style	Model #	Dimensions W x D x H (In.)	Amps.	HP	Nema Plug	Capacity (Cu. Ft.)
M1 Low Glass	MAESTRO LX RVS 10 M1	39"x 39.5"x 47.75"	4	1/4	6-15P	1.5
	MAESTRO LX RVS 13 M1	54.75" x 39.5"x 47.75"	5	1/3	6-15P	2.1
	MAESTRO LX RVS 17 M1	70.5" x 39.5"x 47.75"	6	1/3	6-15P	2.8
	(90° Corner Case) MAESTRO LX RVS 90DX M1	61"x 39.5"x 47.75"	4.5	1/3	6-15P	2.5
	(90° Corner Case) MAESTRO LX RVS 90SX M1	61"x 39.5"x 47.75"	4.5	1/3	6-15P	2.5
M3 & M4 High Glass	MAESTRO LX RVS 10 M3/ M4	39"x 39.5"x 52"	4	1/4	6-15P	1.5
	MAESTRO LX RVS 13 M3/ M4	54.75" x 39.5"x 52"	5	1/3	6-15P	2.1
	MAESTRO LX RVS 17 M3/ M4	70.5" x 39.5"x 52"	6	1/3	6-15P	2.8
	(90° Corner Case) MAESTRO LX RVS 90DX M3/ M4	61"x 39.5"x 52"	4.5	1/3	6-15P	2.5
	(90° Corner Case) MAESTRO LX RVS 90SX M1/ M4	61"x 39.5"x 52"	4.5	1/3	6-15P	2.5



LED 4000K




R290 Gas



39°F / 43 °F



Nema 6-15P



220V/60Hz/1-Ph


Important Notes: Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty. Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption. Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.). Tile floors, low ceilings, or small rooms will increase noise level. Compressor air lower front intake. Front panel cannot be blocked.

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.


MAESTRO SD

REFRIGERATED DISPLAY CASE


Top View




MAESTRO SD RVS 10



MAESTRO SD RVS 13




MAESTRO SD RVS 17

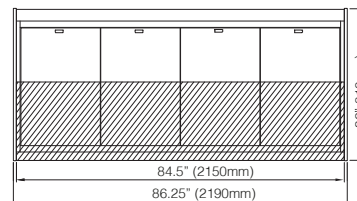

MAESTRO SD RVS 21

Side View

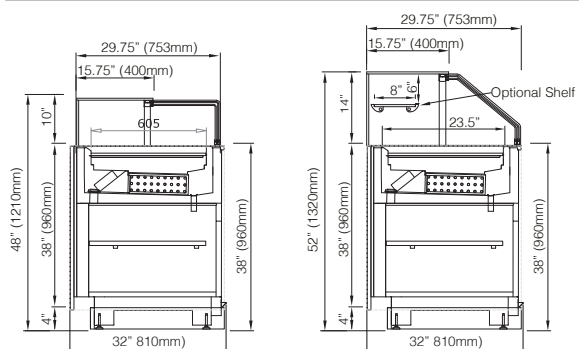


K1 (K2-Opening front glass option)

K3 (K4-Opening front glass option)



Adjustable Deck heights from 4" - 7"

Rear View



Technical Specifications & Electrical Requirements

Glass Style	Model #	Dimensions W x D x H (In.)	Amps.	HP	Nema Plug	Capacity (Cu. Ft.)
K1 (K2) Low Glass	MAESTRO SD RVS 10 K1	39"x 32"x 47.75"	4.4	3/4	6-15P	1.9
	MAESTRO SD RVS 13 K1	54.75"x 32"x 47.75"	4.5	3/4	6-15P	2.8
	MAESTRO SD RVS 17 K1	69"x 32"x 47.75"	4.75	3/4	6-15P	3.6
	MAESTRO SD RVS 21 K1	86.25"x 32"x 47.75"	5	3/4	6-15P	4.5
K3 (K4) High Glass	MAESTRO SD RVS 10 K3	39"x 32"x 47.75"	4.4	3/4	6-15P	1.9
	MAESTRO SD RVS 13 K3	54.75"x 32"x 47.75"	4.5	3/4	6-15P	2.8
	MAESTRO SD RVS 17 K3	69"x 32"x 47.75"	4.75	3/4	6-15P	3.6
	MAESTRO SD RVS 21 K3	86.25"x 32"x 47.75"	5	3/4	6-15P	4.5



LED 4000K




R290 Gas



39°F / 43 °F



Nema 6-15P



220V/60Hz/1-Ph


Important Notes: Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty. Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption. Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.). Tile floors, low ceilings, or small rooms will increase noise level. Compressor air lower front intake. Front panel cannot be blocked.

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.


MAESTRO SLIM

REFRIGERATED DISPLAY CASE


Top View

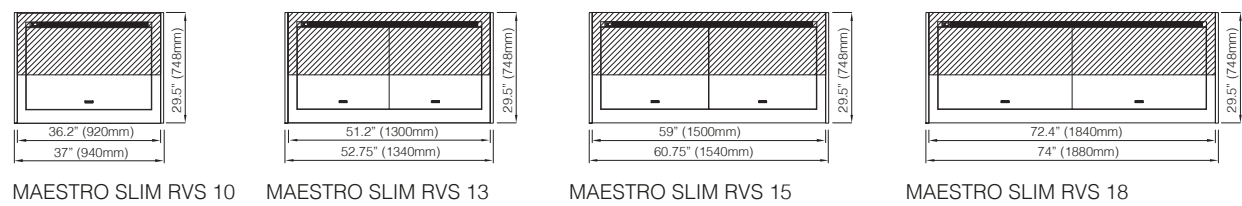

Side View

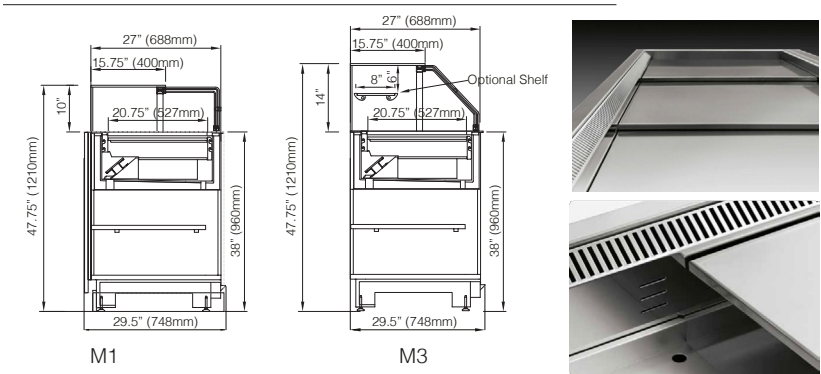

Rear View



Technical Specifications & Electrical Requirements

Glass Style	Model #	Dimensions W x D x H (In.)	Amps.	HP	Nema Plug	Capacity (Cu. Ft.)
M1 Low Glass	MAESTRO SLIM RVS 10 M1	37"x 29.5"x 47.75"	4.5	3/4	6-15P	1.3
	MAESTRO SLIM RVS 13 M1	52.75"x 29.5"x 47.75"	4.6	3/4	6-15P	2
	MAESTRO SLIM RVS 15 M1	60.75"x 29.5"x 47.75"	4.75	3/4	6-15P	2.3
	MAESTRO SLIM RVS 18 M1	74"x 29.5"x 47.75"	5	3/4	6-15P	2.9
M3 High Glass	MAESTRO SLIM RVS 10 M3	37"x 29.5"x 47.75"	4.5	3/4	6-15P	1.3
	MAESTRO SLIM RVS 13 M3	52.75"x 29.5"x 47.75"	4.6	3/4	6-15P	2
	MAESTRO SLIM RVS 15 M3	60.75"x 29.5"x 47.75"	4.75	3/4	6-15P	2.3
	MAESTRO SLIM RVS 18 M3	74"x 29.5"x 47.75"	5	3/4	6-15P	2.9

LED 4000K

R290 Gas

39°F / 43°F

Nema 6-15P

220V/60Hz/1-Ph

Important Notes: Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty. Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption. Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.). Tile floors, low ceilings, or small rooms will increase noise level. Compressor air lower front intake. Front panel cannot be blocked.

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.